

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
18 March 2004 (18.03.2004)

PCT

(10) International Publication Number
WO 2004/022403 A1

(51) International Patent Classification⁷: B61D 3/04, 3/18

(21) International Application Number:
PCT/SE2003/001315

(22) International Filing Date: 26 August 2003 (26.08.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
0202653-2 9 September 2002 (09.09.2002) SE

(71) Applicant (for all designated States except US): NOVA-
TRAIN AB [SE/SE]; Box 594, S-201 25 Malmö (SE).

(72) Inventor; and

(75) Inventor/Applicant (for US only): BERGLUND, Peter
[SE/NL]; Penninghof 3, NL-5551 VK Valkens Waard (NL).

(74) Agent: STRÖM & GULLIKSSON IPC AB; P.O. Box
4188, S-203 13 Malmö (SE).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: DEVICE AND METHOD FOR FACILITATING LOADING/UNLOADING OF A RAIL GOODS TRANSPORTER

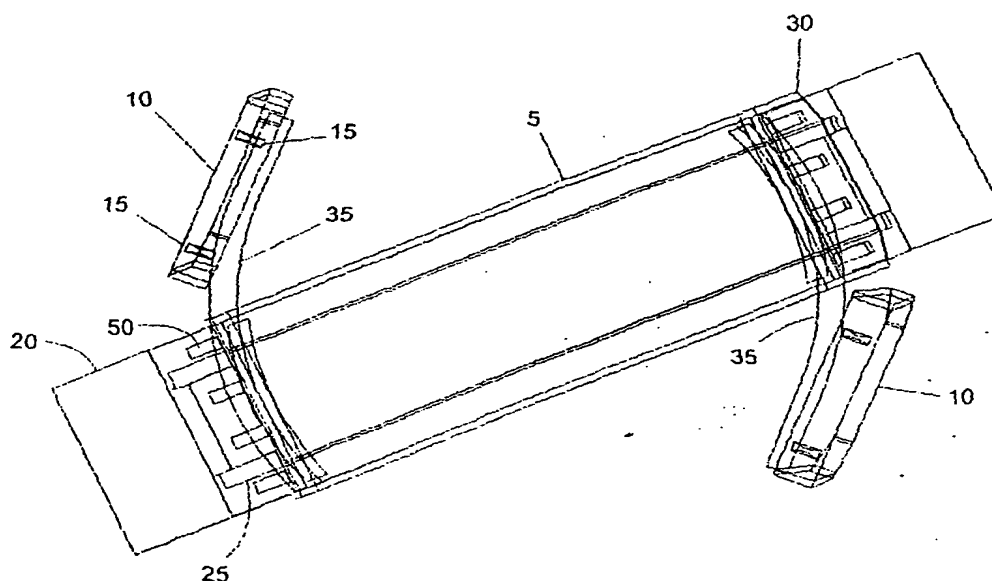

(57) **Abstract**: Device and method for facilitating loading/unloading of goods from a goods wagon (1) comprising least one load-carrying unit (5), and two wagon portions (10). The wagon portions are provided with means for transport on rail, and the load-carrying unit (5) is separable from the wagon portions (10) on at least one end, and is movable to facilitate loading/unloading of the load-carrying unit (5). The load-carrying unit (5) is provided with at least one slide foot that slides over an according slide belt during lateral displacement of at least one end of the load-carrying unit.

WO 2004/022403 A1